

HLC-58C-IMP

Dakota Digital HDX Clock Installation
For 1958 Chevrolet Impala

Your new HLC-58C-IMP kit includes:


Installation Manual



HLC Clock



Harness

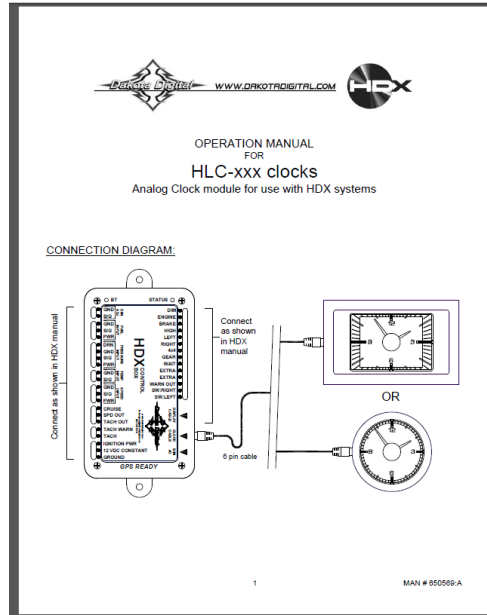

(4X) Thumb Nuts




(4X) 5/8" Length Flathead Screws

Installation

1. Disconnect and remove the original clock by removing the dash trim and the four nuts on the backside.




Supplied Screws

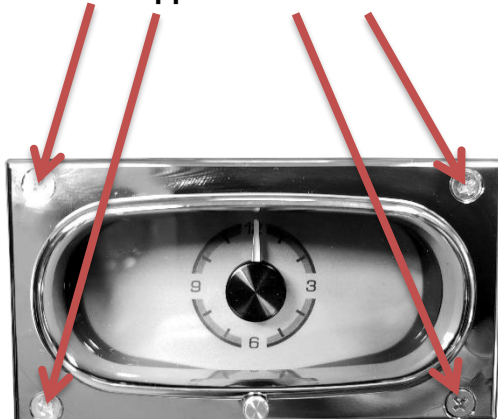


2. With the original clock removed, carefully maneuver the HLC clock in place and secure the gauge with the supplied hardware.

3. With the HLC clock in place, re-install the dash trim by slipping the tabs on the left side of the trim around the edge of HDX bezel and then using the stock hardware to secure the trim to the dash all while being careful not to scratch the HDX bezel.

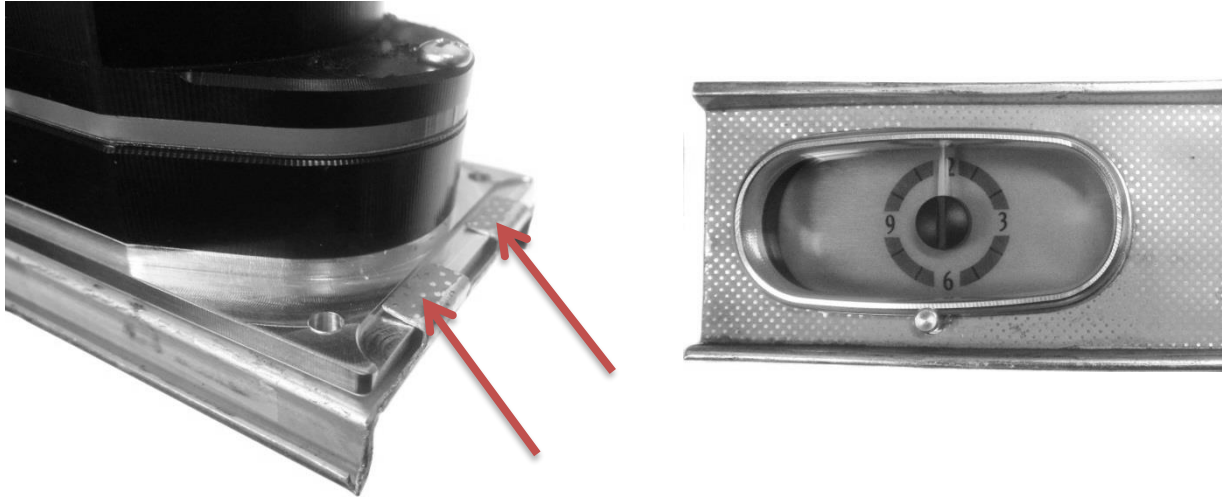

4. Connect the provided harness to the clock. Route the other end to the HDX control box. Refer to enclosed clock operating manual for these connections and setup.

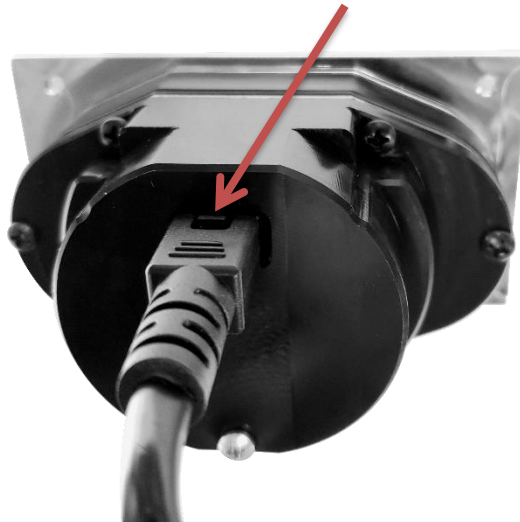

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital