




RLC-49F

Dakota Digital RLC Clock Installation
For 1949-'50 Ford cars

Your new RLC-49F kit includes:

RLC Operation Manual

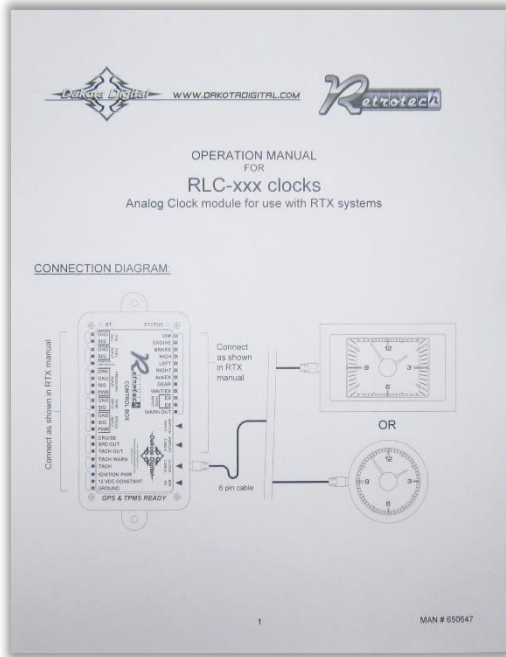

RLC Clock



RLC Harness




2x 8-18 x 3/4" Screws



Installation


1. Remove the original clock by disconnecting the wiring and removing two screws behind the dash.

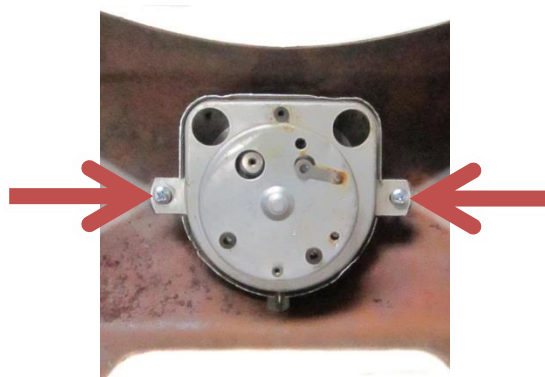

2. Secure the new RLC clock to the dash using the two supplied 8-18 x 3/4" screws.



3. Connect the provided RLC harness to the clock and carefully route the other end to the RTX control box. Refer to the enclosed clock operation manual to complete the RLC clock setup.

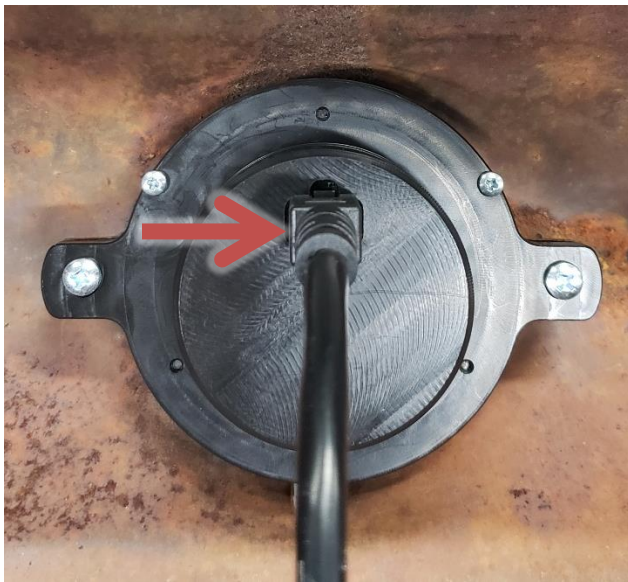

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2022 - Dakota Digital

Manual # 650788