



GRFX-3100

Dakota Digital Universal GRFX Instrument Installation

Your new GRFX-3100 kit includes:

GRFX Display


(2x) C-Clamp
Brackets and
Thumb Nuts



Universal
Sender Pack



Installation Manuals

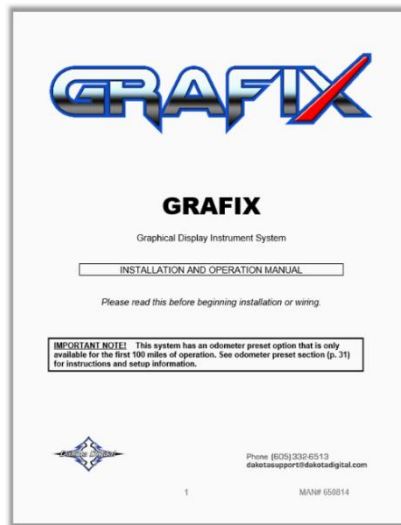


Control Box



Installation

36" Main Harness

1. Use the provided template to mark out the opening needed to fit the GRFX display in the desired location. Ensure there is adequate clearance with overall size including behind the desired mounting location; the display requires approximately 2" of depth.

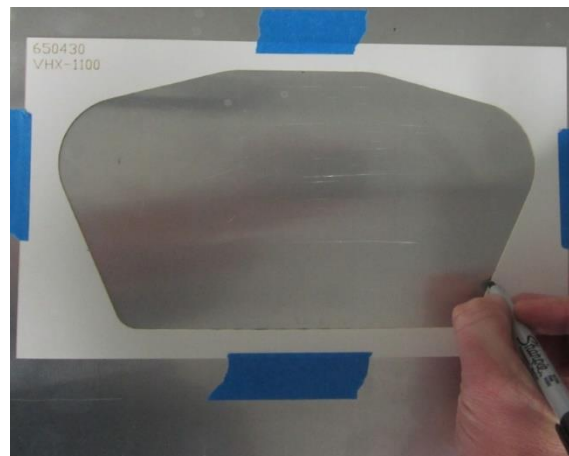

Manual # 650848

2. Once an appropriate opening has been cut out, carefully insert the GRFX display from the front side and attach the two included **C-Clamp Brackets** to the back of the display using the four provided **Thumb Nuts**. The brackets are designed to be oriented just one way; ensure there is equal spacing off both sides of the display. If mounted incorrectly, the brackets will be snug on the bottom side and have an excess gap at the top.



3. Connect the provided **36" Main Harness** to the back of the GRFX system. Carefully route the open end of the harness to the desired control box mounting location. If desired, a backup camera can also be connected using the available RCA input.



4. Refer to the main GRFX manual for wiring instructions to complete the system installation.



Note: Configuration of themes, colors and gauges are covered in the main manual.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital

Manual # 650848