



GRFX-57C

Dakota Digital GRFX Instrument Installation For 1957 Chevy car

Your new GRFX-57C kit includes:



Installation

1. Remove the stock instrument cluster, then remove the original gauges from the back of the housing. The original chrome bezels will be retained.




2. Install the new GRFX system using the eight included **8-32 x 3/8" Screws** and **Lock Washers**. Viewing from the back side, mount the gauge labelled "R" on the left, and "L" on the right.




3. (Optional): If using all original indicator lights above the instrument cluster, skip to step four.


Original indicator locations may be covered with the four included **Block-Off Lenses**. To install the block-offs; remove any unwanted original indicator bezels and lenses. Drop the new block-off lens into the bezel and secure with RTV silicone. Allow at least two hours to dry before re-installing the indicator bezels into the dash.

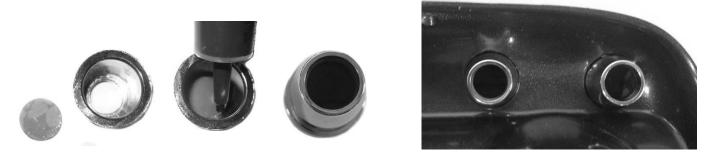

4. Connect the provided **Interconnect Harness** to the back of the GRFX system. If desired, a backup camera can also be connected using the available RCA input.

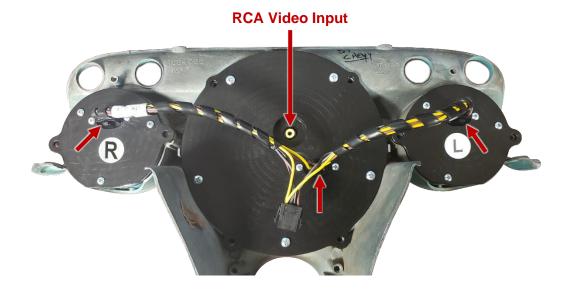

5. Connect the provided **Main Harness** to the interconnect harness. Carefully route the other end of the harness to the control box mounting location.

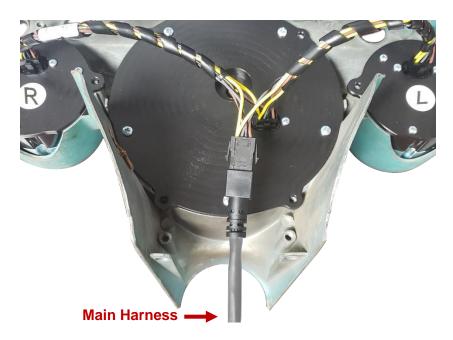

6. Re-install the cluster into the vehicle using the retained factory hardware. Refer to the main GRFX manual for wiring instructions to complete the installation.



MARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107

www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2024 - Dakota Digital