



RTX-53F-PU

Dakota Digital RTX Instrument Installation For 1953-55 Ford Pickup




Installation


1. Remove the stock gauges from the dash by removing the four screws securing the gauges to the dash.



2. From the rear of the dash; insert the RTX system into the opening and securely mount using the four 10-24 screws provided. The two (2) counter sunk screws are for the upper two locations and the two (2) pan heads are for the lower two locations.

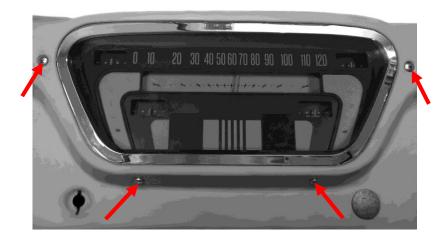

3. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of the main harness to the control box.

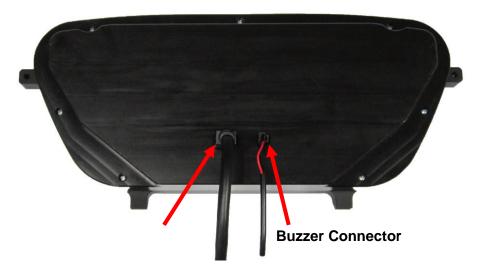

4. Refer to the main manual for wiring instructions to complete the RTX installation.

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2020 - Dakota Digital