



RTX-82C-CAM

Dakota Digital RTX Instrument Installation
For 1982-89 Camaro

Your new RTX-82C-CAM kit includes:

RTX Display



Universal Sender Pack



Buzzer




Installation Manuals



36" Main Harness

Switch Assembly

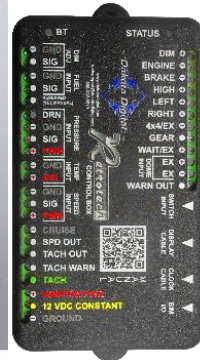


Control Box

Black-Out Lenses




Installation

1. Remove the stock gauges from the dash. Remove the eight screws holding the gauges to the bezel on the front of the system. Keep these screws, because they will be reused in the assembly.

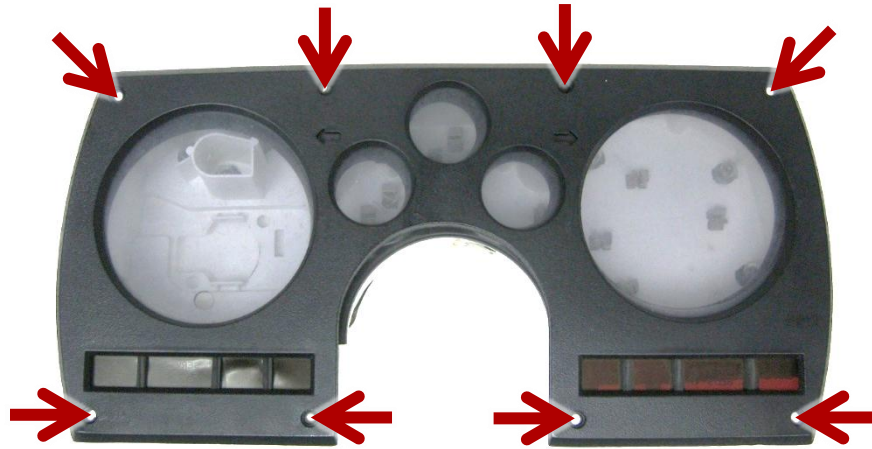


2. Remove the stock gauges, light indicators, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be discarded. Now is a good time to clean the bezel.

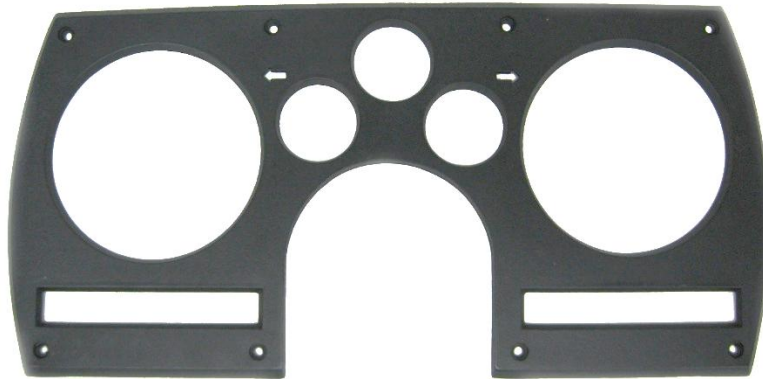

3. Remove the protective film from the two provided **Black-Out Lenses**.




4. Place lenses so that the side you just removed film from will face outwards (the same as the gauges). The lenses are identical.

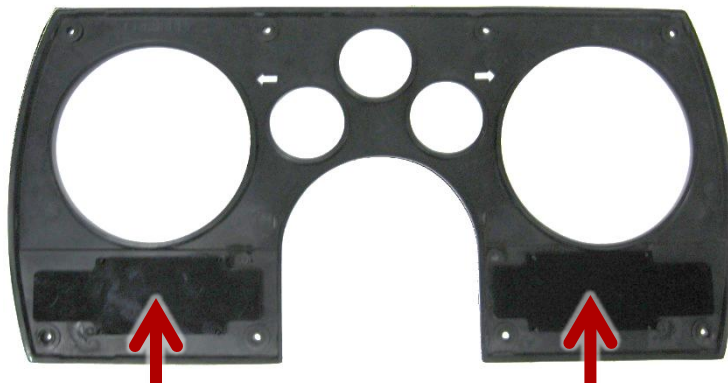


5. Remove the protective tape from the RTX system's clear lens and install into the factory bezel. Carefully insert the system to avoid damage to the lens. The RTX system should fit tight and the lens should sit flush with the bezel.



6. Connect the **36" Main Harness** to the RTX system. Carefully route the open end of the harness to the desired control box mounting location. The included **Buzzer** may also be connected for optional audio feedback.

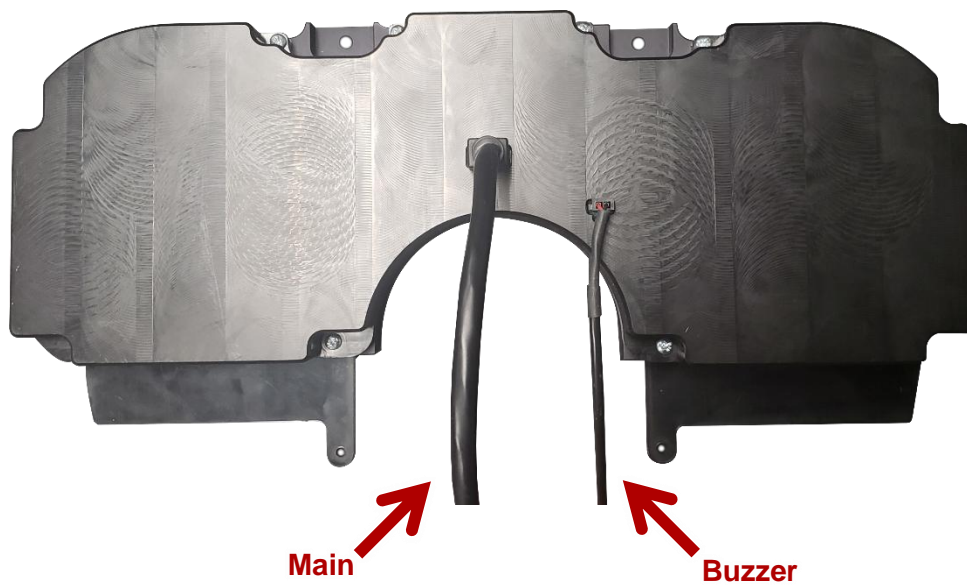

- Secure the RTX system and the bezel back into the dash using the eight original screws. Refer to the main manual for wiring instructions to complete the RTX installation.

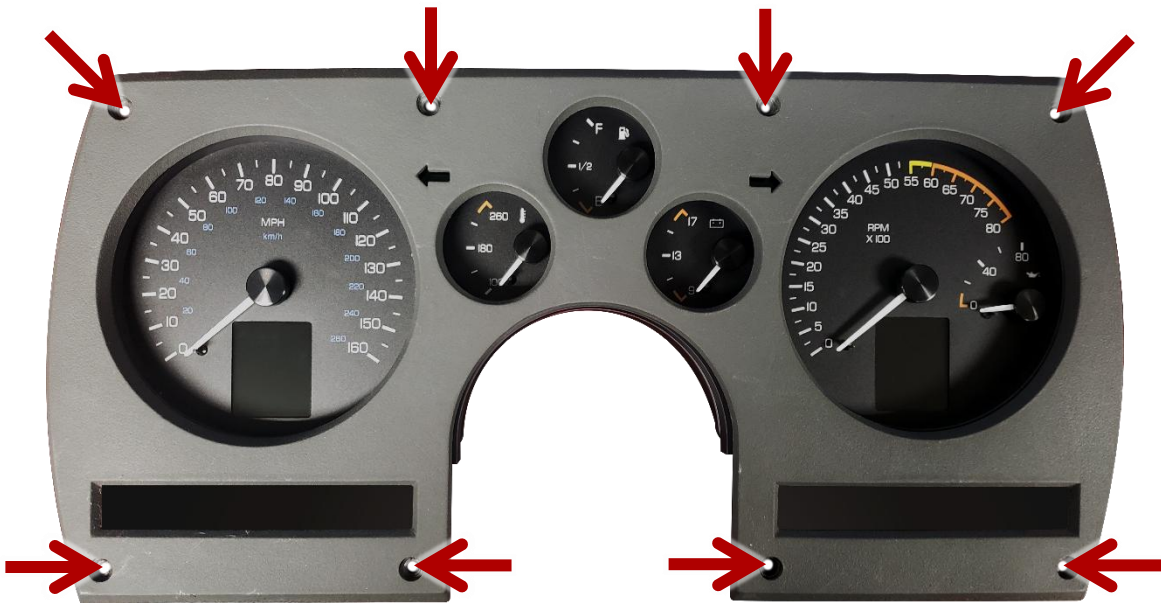

⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital