



RTX-90C-CAM

Dakota Digital RTX Instrument Installation
For 1990-'92 Chevrolet Camaro

Your new RTX-90C-CAM kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



36" Main Harness

Switch Assembly



Control Box

Installation

1. Remove the stock gauge cluster from the dash by removing the four screws indicated below. Retain this hardware for reassembly.




2. The original inner gauge panel and rubber dust seal will be reused; remove the six screws that secure the clear lens and the additional three screws on top that retain the inner gauge panel. Save all hardware for reassembly.



3. Press the rubber dust seal onto the pegs on the lower half of the RTX display. Mount the original inner gauge panel using seven of the retained factory screws from step two.



4. Connect the **36" Main Harness** to the RTX system. Carefully route the open end of the harness to the desired control box mounting location. The included **Buzzer** may also be connected for optional audio feedback.

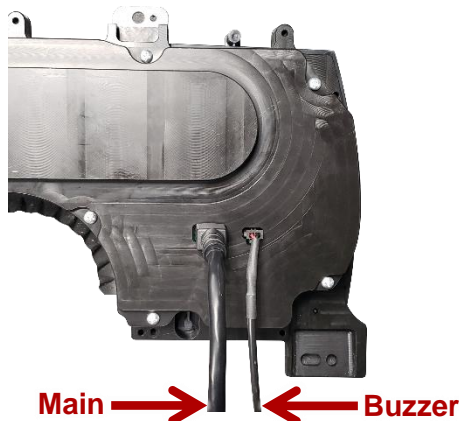

5. Mount the RTX display to the vehicle's dash using the four retained factory screws from step one.



6. Reassemble the dash in reverse order of disassembly using the retained hardware from step one. Refer to the main RTX manual for wiring instructions to complete the system installation.



⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital